



EN 795B:2012
(MOBILE ANCHOR)
TS 16415:2013
(USE FOR TWO PERSONS)

Tip: the loops are great to adjust the length to your needs.



- Used for SRT or DRT.
- Main anchor, base anchor or redirect.
- Used to connect the access rope and the climbing rope.
- Can be used for two persons.

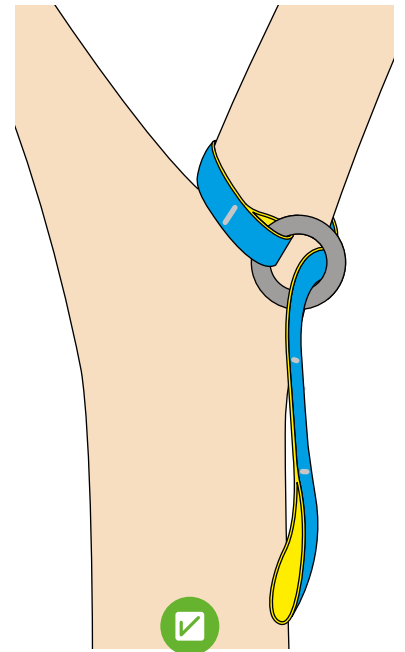


2 set ups: passed through the ring or through the loop.




You can connect 2 JOKER LIGHT anchors **only** if one has the black protection sleeve.

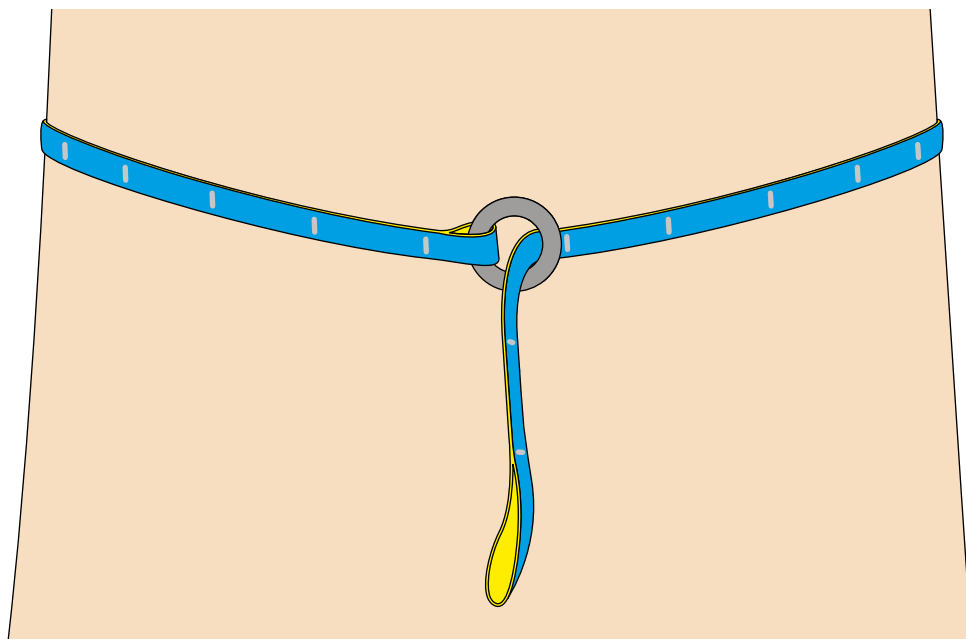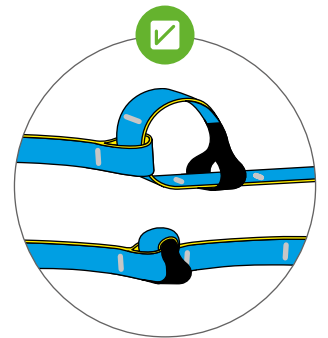


JOKER LIGHT 5 m or 2 m with 1 ring used as a base anchor.

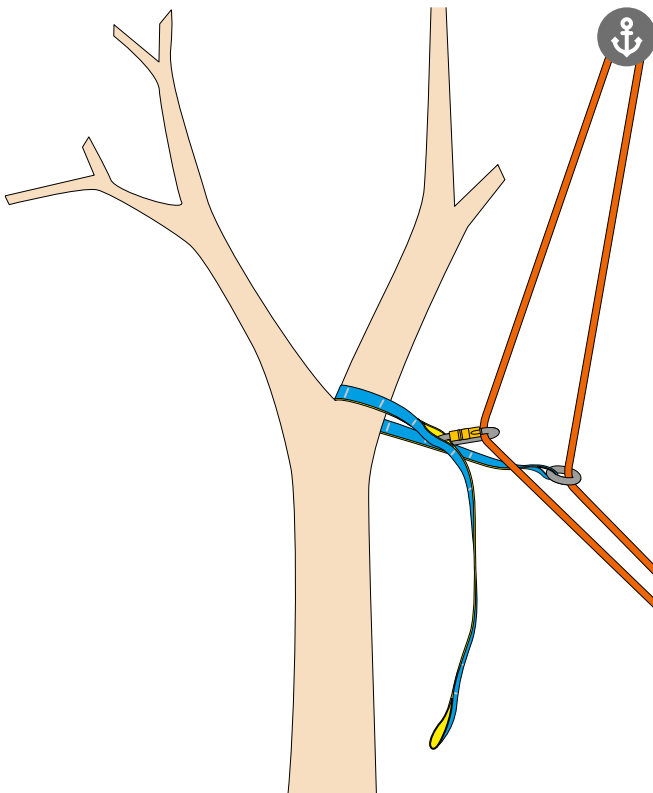


Removable redirect for DRT,
JOKER LIGHT used doubled.

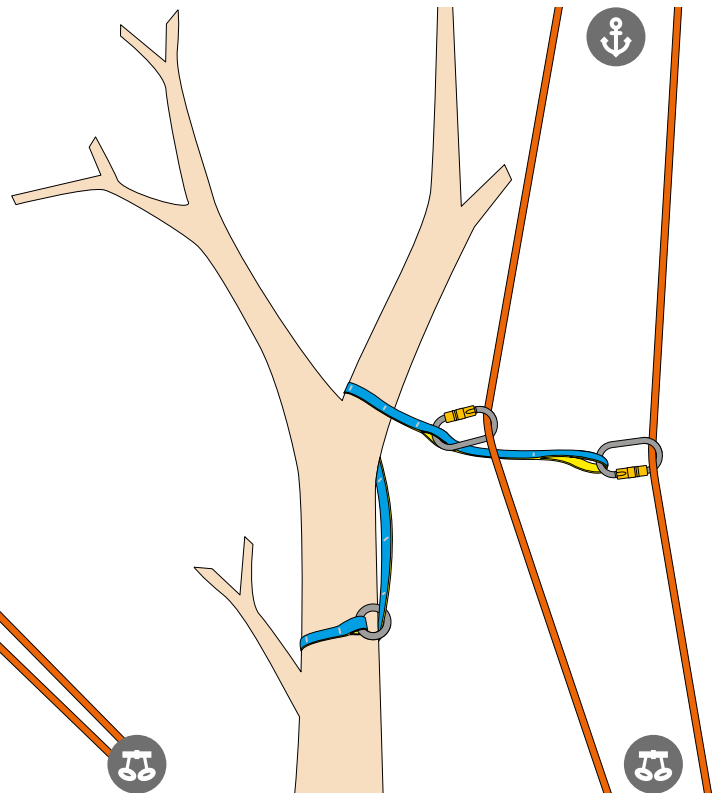

Non removable redirect for DRT.
JOKER LIGHT used simple.

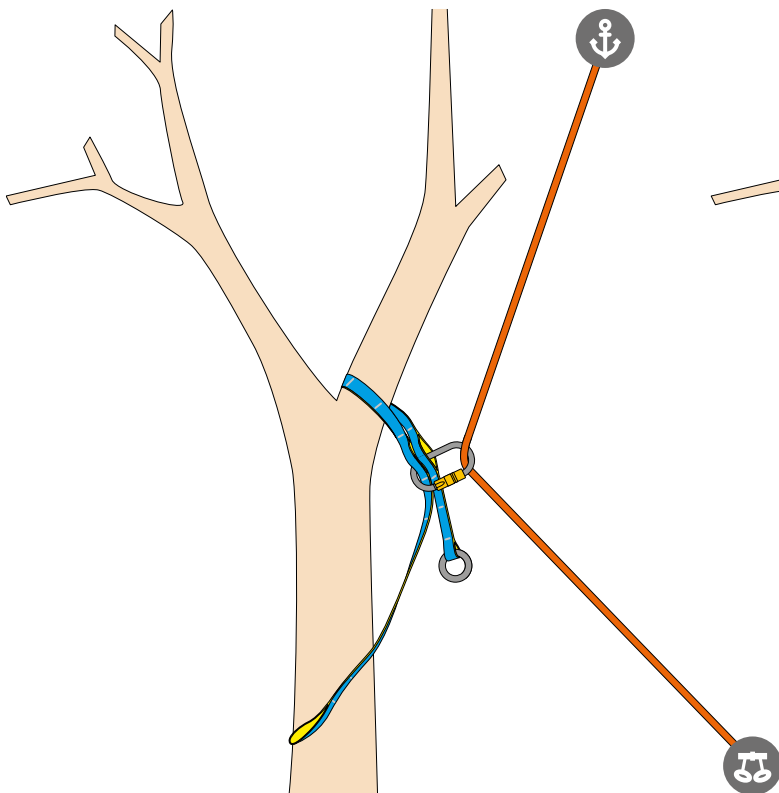


Simple redirect for SRT,
JOKER LIGHT used doubled.

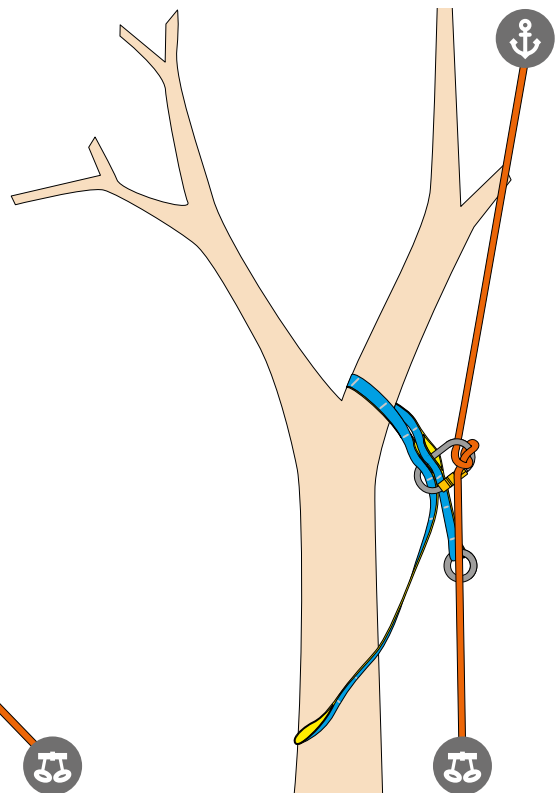


SRT redirect with Munter hitch, JOKER LIGHT used doubled.
Helps adjusting the tension with the main anchor point.


USES FOR JOKER LIGHT 1,10 M & 2 M ONE RING OR JOKER LIGHT 1,10 M TWO RINGS.

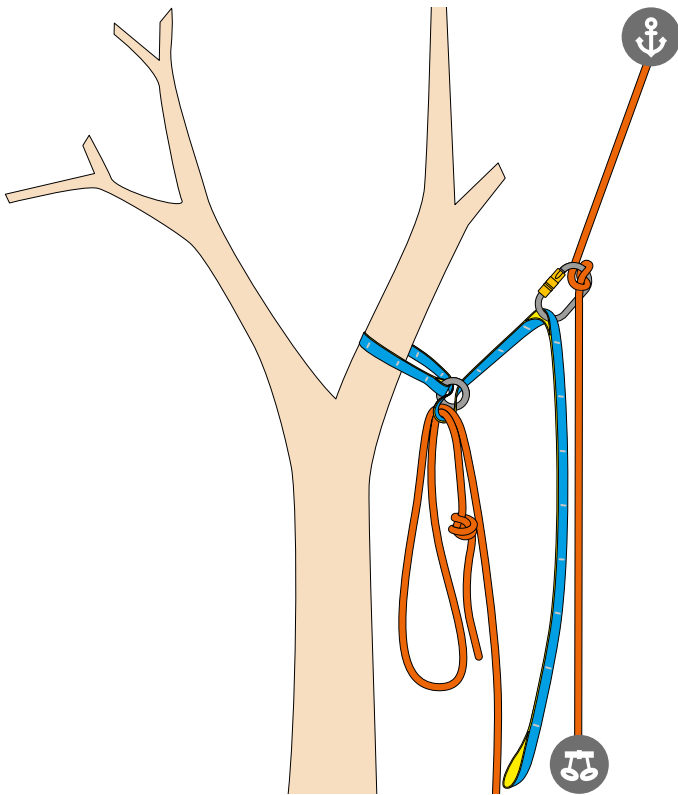


SRT removable redirect on Munter hitch.

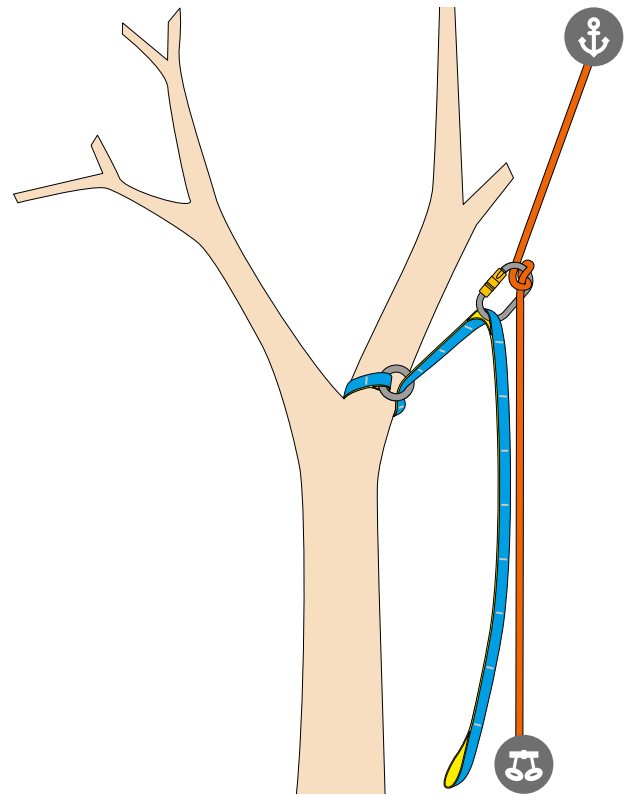

SRT redirect with Munter hitch.
Helps adjusting the tension with the main anchor point.

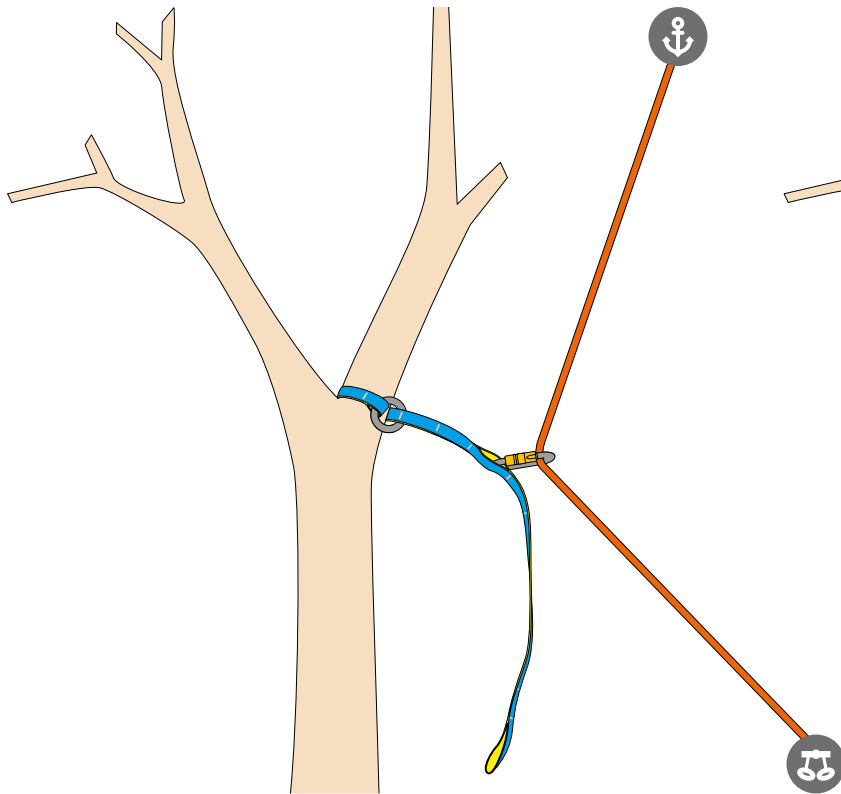


Simple SRT redirect,
rope through a connector.

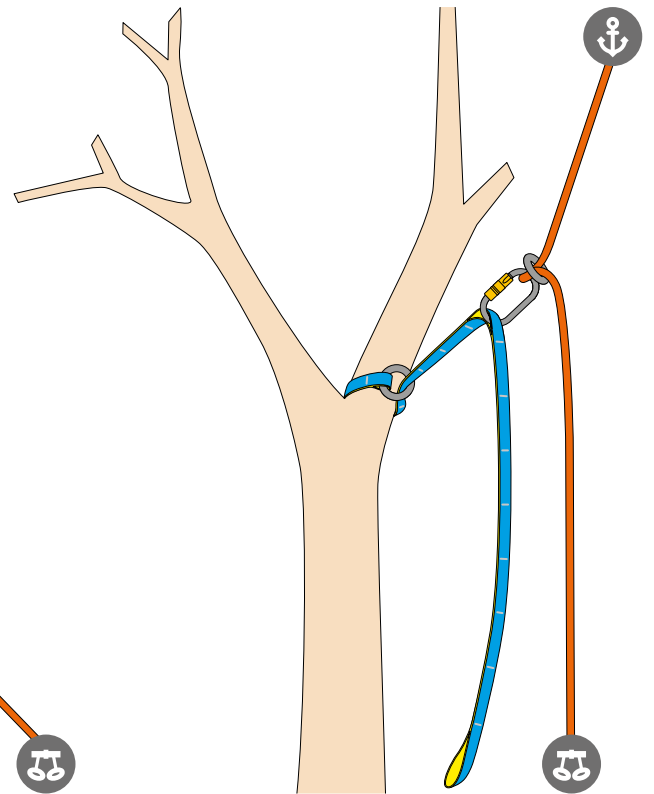


SRT redirect with an extra ring.
Helps adjusting the tension with the main anchor point.


USES FOR JOKER LIGHT 1,10 M & 2 M ONE RING OR JOKER LIGHT 1,10 M TWO RINGS.

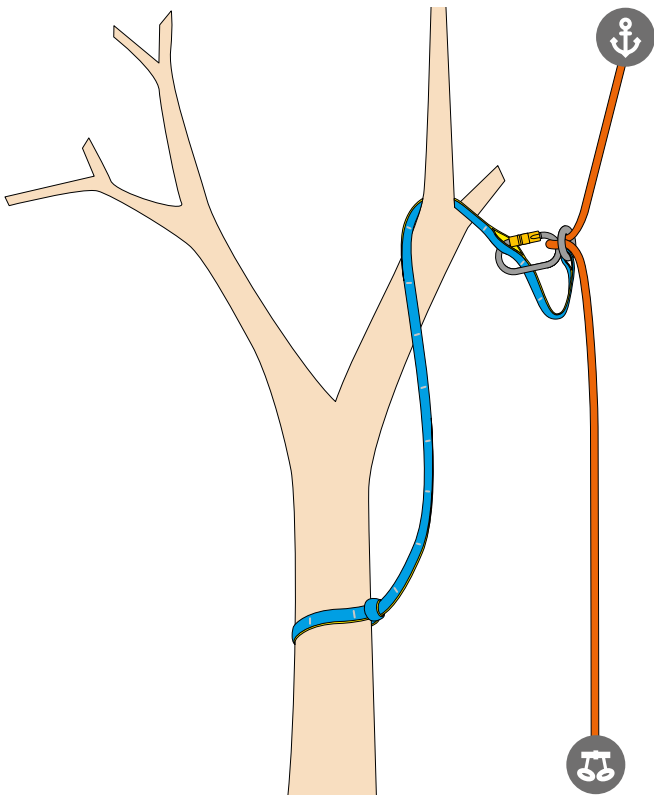


SRT redirect using the JOKER LIGHT's ring.
Helps adjusting the tension with the main anchor point.

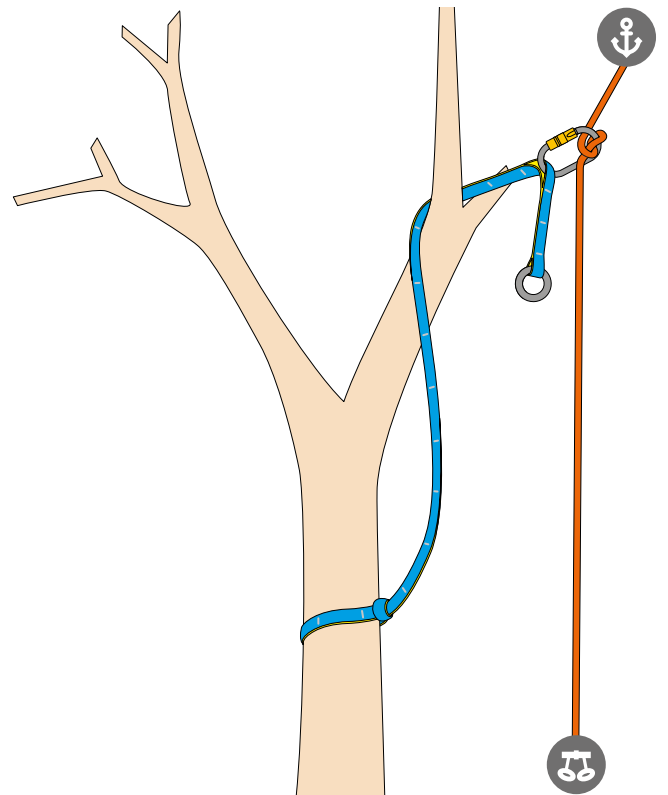

SRT redirect with Munter hitch.
Helps adjusting the tension with the main anchor point.

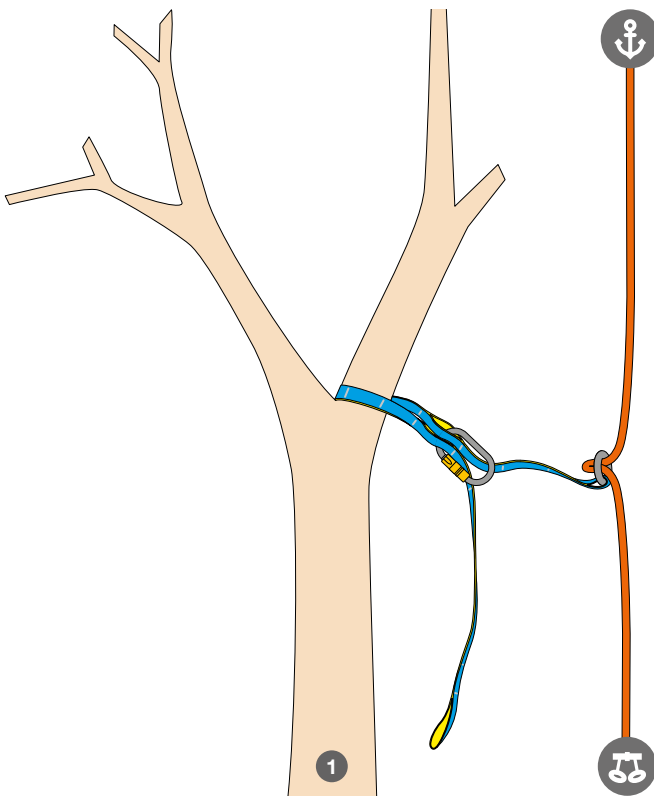


1

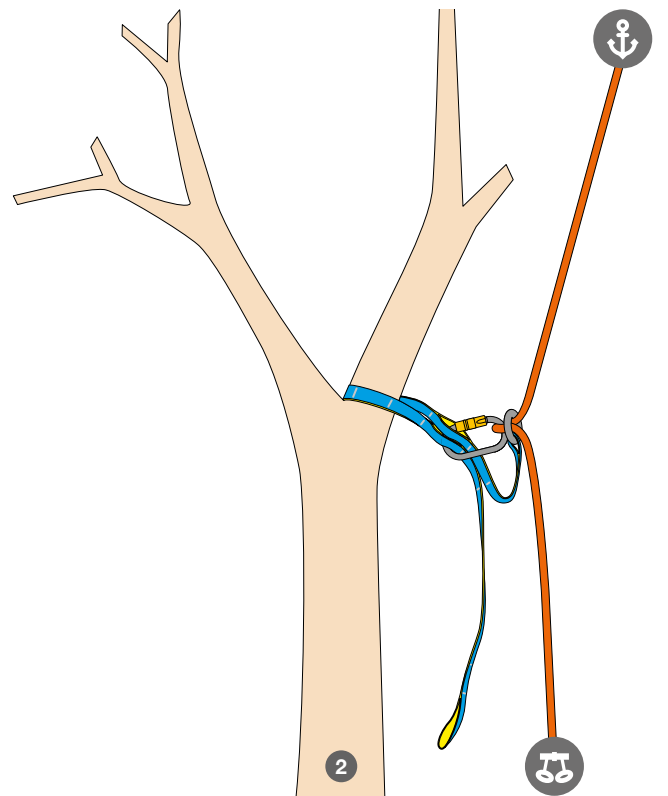


2

1 and 2: setting up the SRT redirect, with JOKER LIGHT one ring used doubled.
Helps adjusting the tension with the anchor point.

USES FOR JOKER LIGHT 1,10 M & 2 M ONE RING OR JOKER LIGHT 1,10 M TWO RINGS.

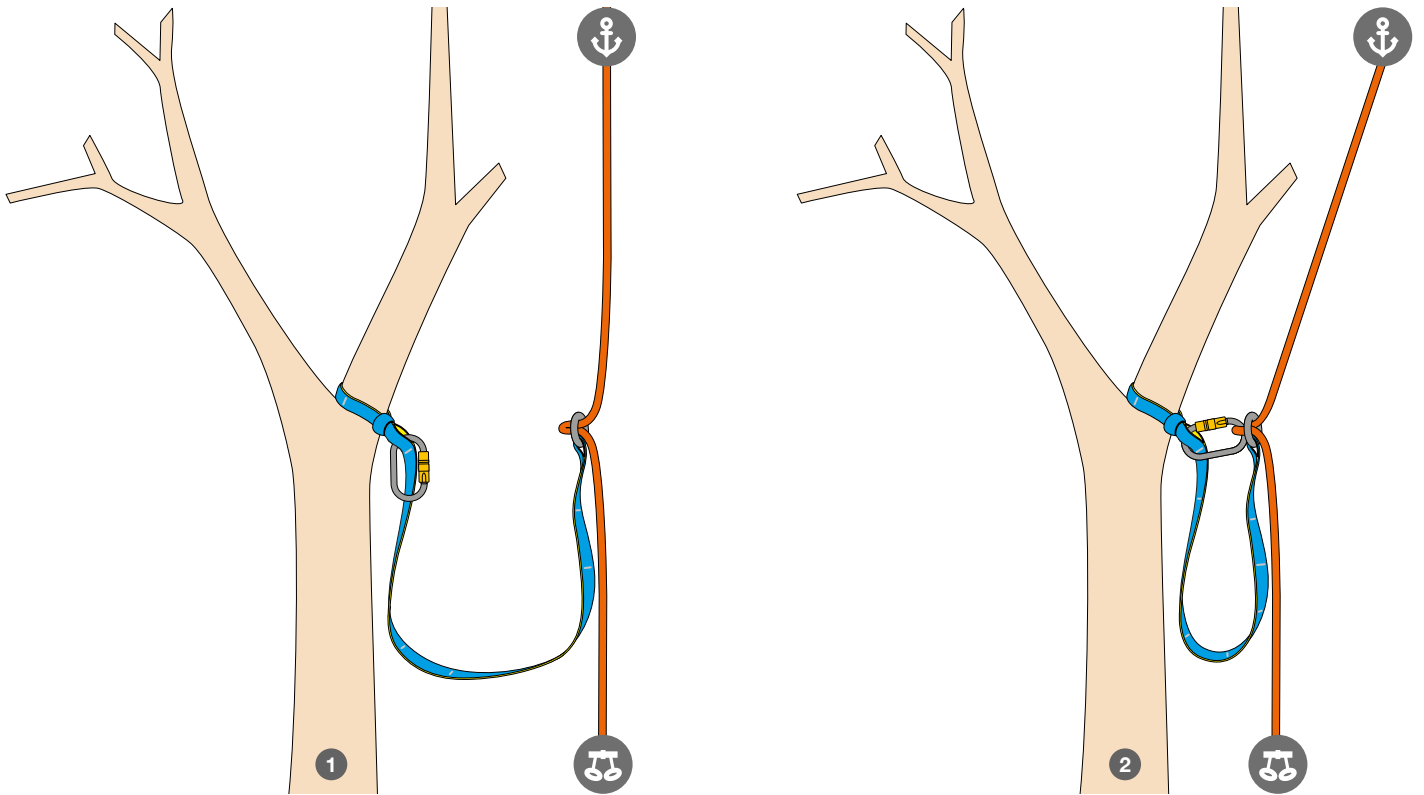


①, ② and ③: setting up the SRT redirect, using JOKER LIGHT's ring. Helps adjusting the tension with the main anchor point.

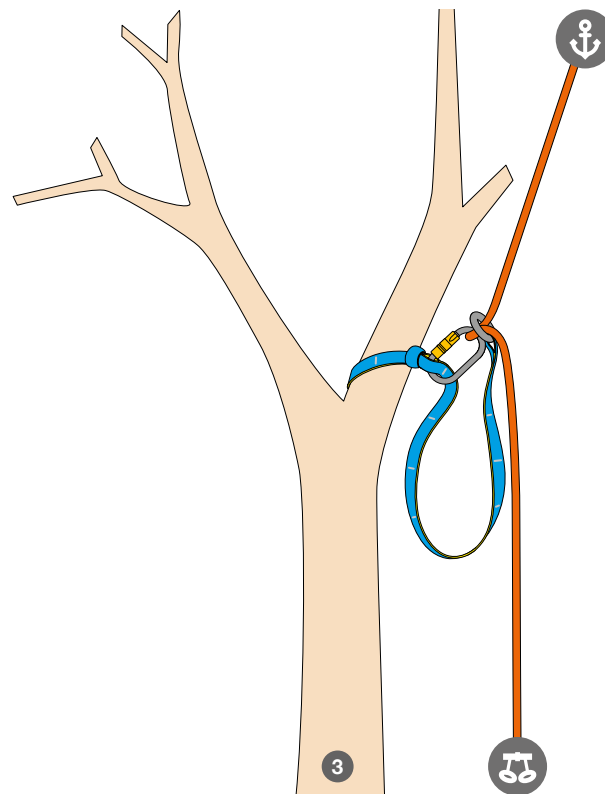


USES FOR JOKER LIGHT 1,10 M & 2 M ONE RING OR JOKER LIGHT 1,10 M TWO RINGS.



JOKER LIGHT 1 ANNEAU
1,10 M OR 2 M

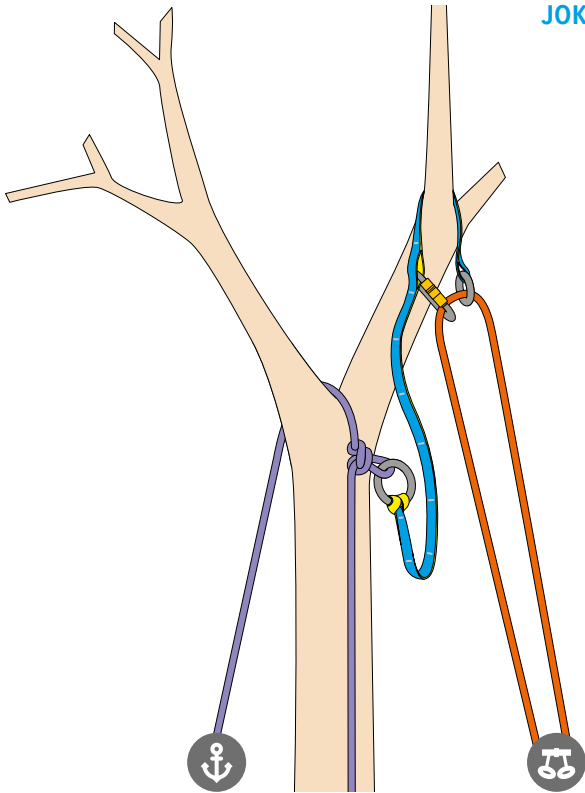


Connecting the main anchor to the access rope, for DRT.

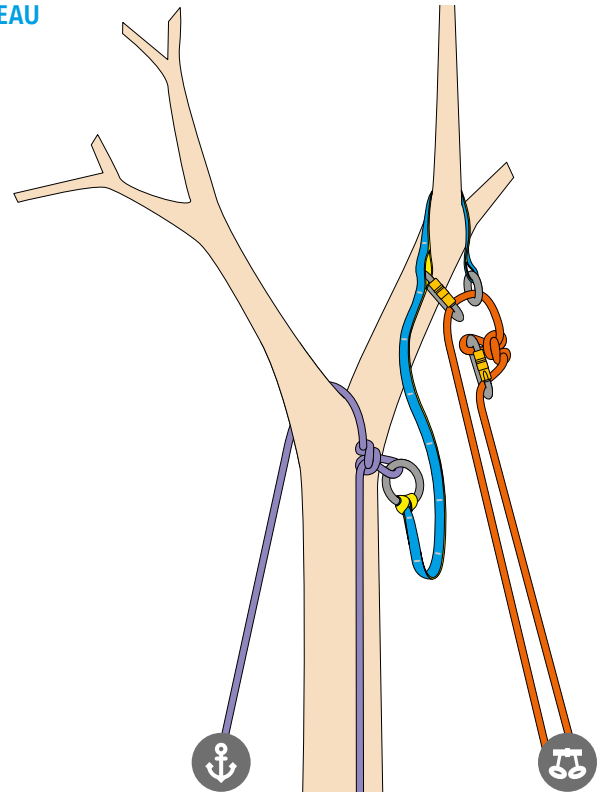


Connecting the main anchor to the access rope, for SRT.


JOKER LIGHT 2 ANNEAUX
1,10 M OR 2 M

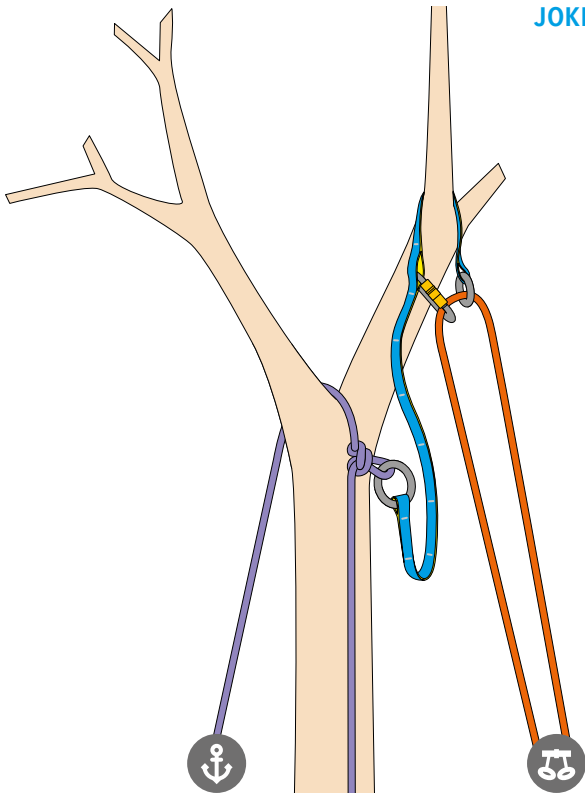



Connecting the main anchor to the access rope, for DRT.

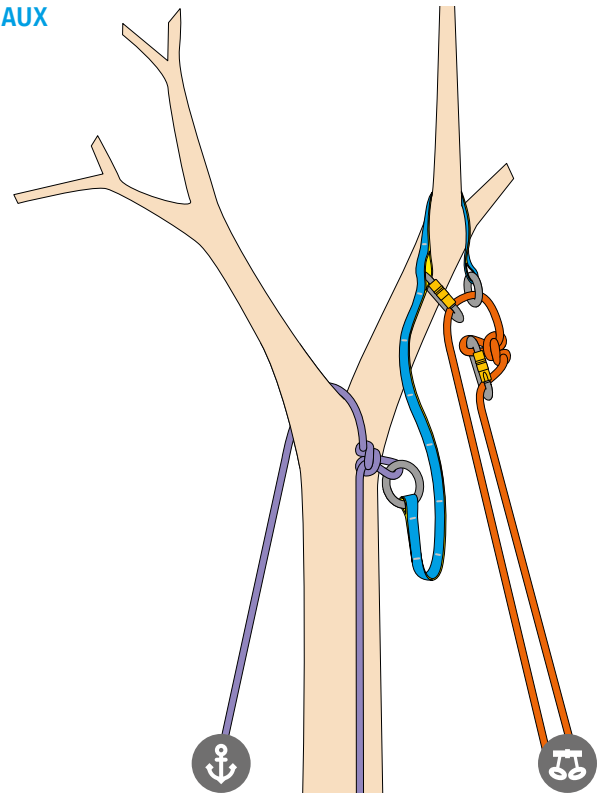

Connecting the main anchor to the access rope, for SRT.

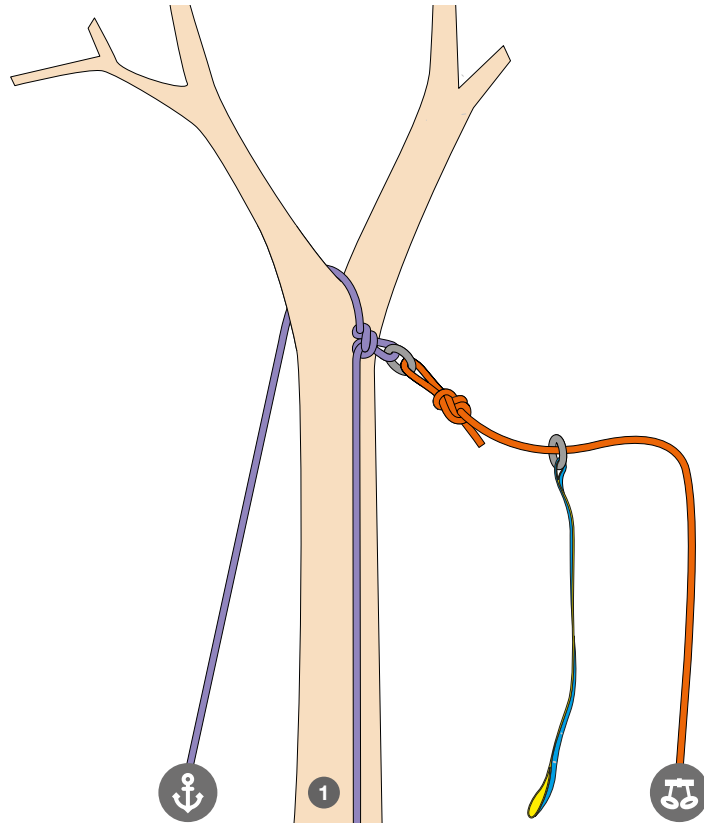

1, 2 and 3: connecting the climbing rope to the access rope.

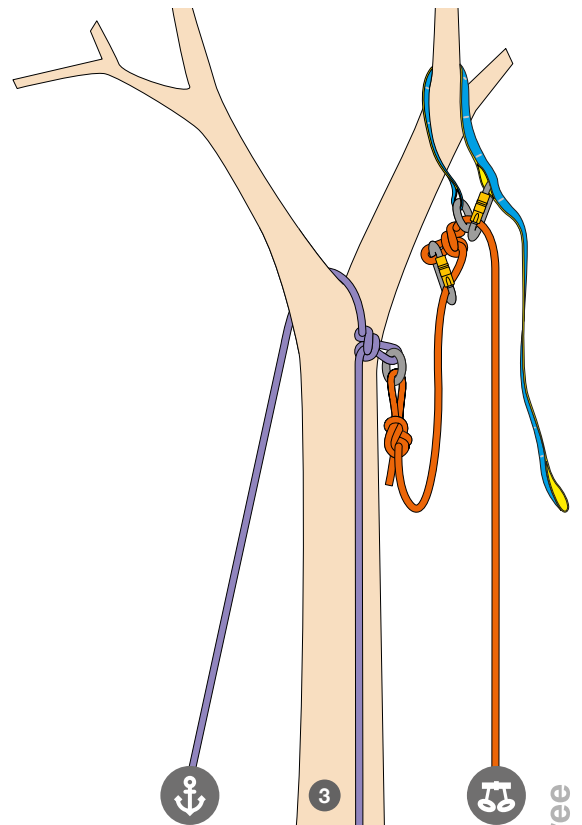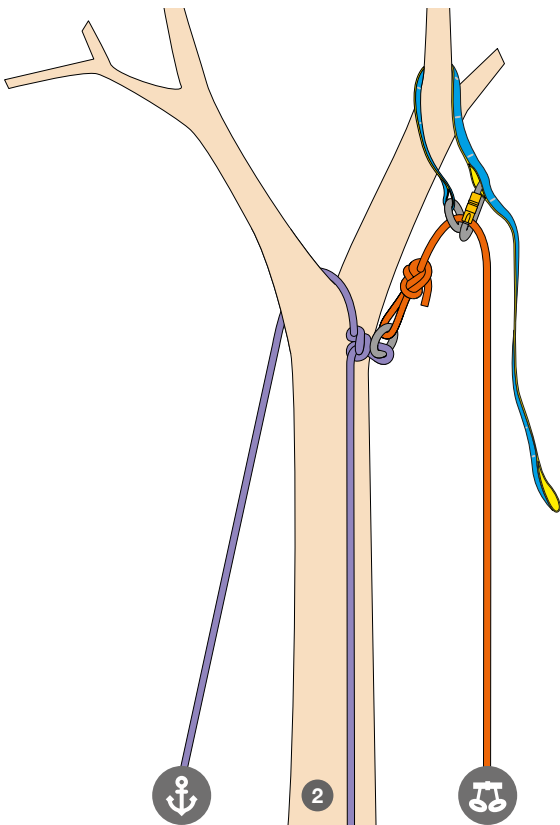

USES FOR JOKER LIGHT 1,10 M & 2 M ONE RING OR JOKER LIGHT 1,10 M TWO RINGS.