


Ultra Slings

Features & Benefits

- Constructed from Sterling Rope's 12-strand Hollow Braid.
- Coated for abrasion resistance.
- Available in 4 diameters – 12.7 mm, 15.9 mm, 19.1 mm, and 22.2 mm.
- Features options of Notch hard-coated anodized rigging thimbles, Notch SafeBloc, or DMM Pinto hardware.
- Versatile adjustment with IO pockets for ultimate flexibility.
- Assembled in-house by our expert Rope Logic splicers.

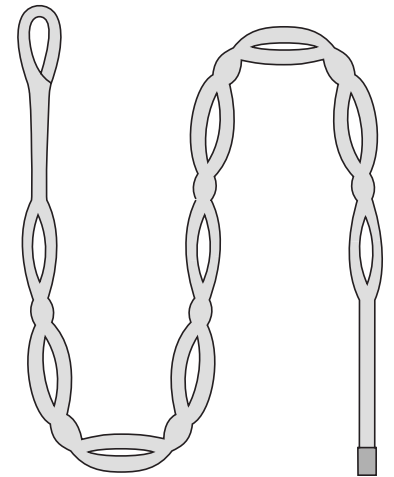

ITEM #	DIAMETER	LENGTH	WLL 5:1 (KG)	HARDWARE	COLOUR	UPC
RIGG-RLOG-0021	12.7 mm	1.5 m	1091	Pinto Rig Pulley	Purple	5056519900756
RIGG-RLOG-0022	19.1 mm	3 m	2364	None	Pink	5056519900763
RIGG-RLOG-0023	19.1 mm	3 m	2364	SafeBloc	Pink	5056519900770
RIGG-RLOG-0024	19.1 mm	3 m	2364	28 mm Ring	Pink	5056519900787
RIGG-RLOG-0025	19.1 mm	3 m	2364	38 mm x 2 Rings	Pink	5056519900794
RIGG-RLOG-0026	22.2 mm	3 m	3545	38 mm Ring	Green	5056519900800